


SPECIFICATIONS

Classification: ASTM F1700 Class III Type B
Total Thickness: 0.120" (3.0 mm)
Wear Layer Thickness: 32 mil (0.8 mm)
Edge Treatment: Square (SE) or Slight Bevel (SB)
Emboss: Quarry (QU)
Warranty: 20-Year Limited Commercial Wear Warranty
Colors: 11
Adhesive: Tarkett RollSmart™, CENTI 2001 Wet Set, CENTI 6000 SP, CENTI 2000 EP or other approved adhesives.

Installation Methods:

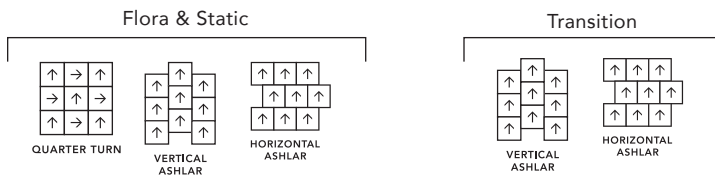

| SIZES | RIOT FLORA/RIOT STATIC | RIOT TRANSITION |
|-------|---------------------------------|---------------------------------|
| | 18" x 36" (45.72 cm x 91.44 cm) | 18" x 36" (45.72 cm x 91.44 cm) |
| | 18" x 18" (45.72 cm x 45.72 cm) | 18" x 18" (45.72 cm x 45.72 cm) |
| | 36" x 36" (91.44 cm x 91.44 cm) | |

TESTING

| | | |
|-------------------------------|------------|---------------------------------|
| Flexibility: | ASTM F137 | Passes |
| Dimensional Stability: | ASTM F2199 | Passes |
| Static Load: | ASTM F970 | Passes |
| Residual Indentation: | ASTM F1914 | Excellent |
| Flammability: | ASTM E648 | CRF≥0.45 watts/cm² NFPA Class 1 |
| Slip Resistance: | ASTM D2047 | Passes >0.5 ADA Compliant |
| Smoke Density: | ASTM E662 | Passes <450 D ^{MC} |
| Resistance to Light: | ASTM F1515 | Excellent |
| Chemical Resistance: | ASTM F925 | Excellent |
| Resistance to Heat: | ASTM F1514 | Excellent |

ENVIRONMENTAL DATA

| | | |
|----------------------------|--|--|
| Recycled Content: | 27.5% Preconsumer | |
| Materials: | No Heavy Metals; Non-Toluene Ink System | |
| Indoor Air Quality: | Meets CDPH Standard Method v1.1-2010; FloorScore® Certification | |
| Recyclability: | 100% Recyclable through our ReStart® Program | |
| LEED Scoreboard: | LEED 2009 | LEED v4 |
| | MRC2 Construction Waste Management | MRC2 Building Product Disclosure and Optimization – Environmental Product Declarations |
| | MRC4 Recycled Content | MRC3 Building Product Disclosure and Optimization – Sourcing of Raw Materials |
| | MRC5 Regional Materials | MRC5 Construction and Demolition Waste Management |
| | IEQ 4.1 Low-Emitting Adhesives | IEQc2 Low-Emitting Materials |
| | IEQ 4.3 Low-Emitting Materials Flooring | |
| Manufacturing: | Made in the USA ISO 9001 Quality Management System ISO 14001 Environmental Management System OHSAS 18001 Occupational Health and Safety Management System | |

Packaging: Packaged in recycled, corrugated cardboard



- For samples, warranties and more information, visit <http://collectionsinfinies.tarketta.com/>.
- Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate changes without notice.
- Chair glides are recommended for optimum textural performance. Absent the use of chair glides, more intensive maintenance will be required for areas in direct contact with furniture footing, and some degree of appearance change is to be expected.