

COLLECTIONS INFINIES™

TRANS-MATERIA SOLIDS: MARBLE (IMA), WIRE (IWI), FOIL (IFO), FELT (IFE)
 TRANS-MATERIA TRANSITIONS: FELT TO FELT (IFF), FELT TO FOIL (IFFO), FELT TO MARBLE (IFM), FELT TO WIRE (IFW), FOIL TO FOIL (IFOFO), FOIL TO MARBLE (IFOM), FOIL TO WIRE (IFOW), MARBLE TO MARBLE (IMM), MARBLE TO WIRE (IMW), WIRE TO WIRE (IWW)




THE ULTIMATE FLOORING EXPERIENCE

SPECIFICATIONS

Classification: ASTM F1700 Class III Type B
Total Thickness: 0.120" (3.0 mm)
Wear Layer Thickness: 32 mil (0.8 mm)
Edge Treatment: Square (SE) or Slight Bevel (SB)
Emboss: Quarry (QU)
Warranty: 20-Year Limited Commercial Wear Warranty
Colors: 78
Adhesive: Tarkett RollSmart™, CENTI 2001 Wet Set, CENTI 6000 SP, CENTI 2000 EP or other approved adhesives.

Installation Methods:

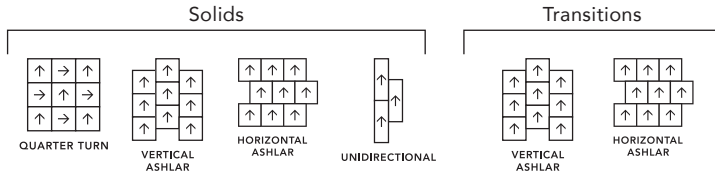

SIZES

SOLIDS

6" x 36" (15.24 cm x 91.44 cm)
 18" x 36" (45.72 cm x 91.44 cm)
 18" x 18" (45.72 cm x 45.72 cm)

TRANSITIONS

18" x 36" (45.72 cm x 91.44 cm)
 18" x 18" (45.72 cm x 45.72 cm)

TESTING

Flexibility:	ASTM F137	Passes
Dimensional Stability:	ASTM F2199	Passes
Static Load:	ASTM F970	Passes
Residual Indentation:	ASTM F1914	Excellent
Flammability:	ASTM E648	CRF≥0.45 watts/cm ² NFPA Class 1
Slip Resistance:	ASTM D2047	Passes >0.5 ADA Compliant
Smoke Density:	ASTM E662	Passes <450 D ^{MC}
Resistance to Light:	ASTM F1515	Excellent
Chemical Resistance:	ASTM F925	Excellent
Resistance to Heat:	ASTM F1514	Excellent

ENVIRONMENTAL DATA

Recycled Content: 27.5% Preconsumer
Materials: No Heavy Metals; Non-Toluene Ink System
Indoor Air Quality: Meets CDPH Standard Method v1.1-2010; FloorScore® Certification
Recyclability: 100% Recyclable through our ReStart® Program
LEED Scoreboard: LEED 2009
 MRc2 Construction Waste Management
 MRc4 Recycled Content
 MRc5 Regional Materials
 IEQ 4.1 Low-Emitting Adhesives
 IEQ 4.3 Low-Emitting Materials Flooring
Manufacturing: Made in the USA
 ISO 9001 Quality Management System
 ISO 14001 Environmental Management System
 OHSAS 18001 Occupational Health and Safety Management System

LEED v4
 MRc2 Building Product Disclosure and Optimization – Environmental Product Declarations
 MRc3 Building Product Disclosure and Optimization – Sourcing of Raw Materials
 MRc5 Construction and Demolition Waste Management
 IEQc2 Low-Emitting Materials

Packaging: Packaged in recycled, corrugated cardboard



- For samples, warranties and more information, visit <http://collectionsinfinies.tarketta.com/>.
- Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate changes without notice.
- Chair glides are recommended for optimum textural performance. Absent the use of chair glides, more intensive maintenance will be required for areas in direct contact with furniture footing, and some degree of appearance change is to be expected.